



# 水处理系统用手动多路阀 7

Manual Multi-port Valve for Water Treatment Systems

## TM.F56A/E/F型

执行标准(Implement Standard):Q/WRX001-2008

专利号(Patent NO.):ZL02220153.X

专利号(Patent NO.):ZL02257746.7



TM.F56A



TM.F56E



TM.F56F



## 工作流程图 Service Position

■ 原水 Raw Water   
 ■ 净水 Purified Water   
 ■ 过滤层 Filter



控制模式 Control Model ----- 手动式 Manual

适用压力 Suited Pressure ----- 0.1~0.6MPa

适用水温 Suited Water Temperature ----- 5-45°C



## 产品特点 Product Characteristics

- 采用高平面度、耐磨损、耐腐蚀的端面密封片启闭，密封性能好，使用寿命长。
- 合理的流道设计：运行→正洗→反洗→正洗→运行。
- 启闭扭矩小，操作手感好。
- 可带压操作，无泄漏。

Adopt the high degree pottery, seal slice with scuff resistance, corrosion proof, perfect sealing, and long time for using.

Reasonable fluid design: Service - Fast Rinse - Backwash - Fast Rinse - Service.

Small rotation angle for closing and opening, It feels well for operation.

It could operate with pressure, no leakage.



**温州市润新机械制造有限公司**  
WENZHOU RUNXIN MANUFACTURING MACHINE CO.,LTD

地址(Add): 浙江省温州市南郊龙方工业区1号地块  
Add: No.1, Longfang Ind. Zone, Nanjiao, Wenzhou, Zhejiang, China  
邮编(P.C): 325029      传真(Fax): +86-577-88633258  
电话(Tel): +86-577-88635628 88576511 88631538 88630038  
Http://www.run-xin.com      E-mail: runxin86@yahoo.com.cn

## 应用范围 Range of Application

- 家用净水、软水系统      ● 锅炉给水软化系统
  - 反渗透预处理系统
- Household Purify, Soften System.      Boiler Softening Water System.  
RO Rre-treatment System.

## 技术参数 Technical Parameter

型号	TM.F56A	TM.F56E	TM.F56F
进水口 (Inlet)	1" F	3/4" F or 1/2" F	1" F
出水口 (Outlet)	1" F	3/4" F or 1/2" F	1" F
排水口 (Drain)	1" F	3/4" F or 1/2" F	1" F
中心管 (Riser Pipe)	1.05" OD	1.05" OD	1" D-GB
基座 (Base)	2-1/2" -8NPSM	2-1/2" -8NPSM	2-1/2" -8NPSM
最大产水量 (Water Capacity)	4.5m <sup>3</sup> /h	2m <sup>3</sup> /h	6m <sup>3</sup> /h



# 水处理系统用手动多路阀

Manual Multi-port Valve for Water Treatment Systems



## TM.F56D/N56D型

专利号(Patent NO.):ZL02220153.X

专利号(Patent NO.):ZL02257746.7

执行标准(Implement Standard):Q/WRX001-2008



RoHS



4" 侧装连接件  
connector for side-mounted



TM.F56D/N56D顶装  
(Top-mounted)



TM.F56D/N56D侧装  
(Side-mounted)



# 产品选型 Selected Product (F56D)

## 工作流程图 Service Position

■ 原水 Raw Water   
 ■ 净水 Purified Water   
 ■ 过滤层 Filter



控制器模式 Control Model ----- 手动式 Manual  
 适用压力 Suited Pressure ----- 0.1~0.6MPa  
 适用水温 Suited Water Temperature ----- 5~45℃



运行状态 Service State



## 产品特点

### Product Characteristics

- 采用高平面度、耐磨损、耐腐蚀的端面密封片启闭，密封
- 性能好，使用寿命长。
- 合理的流道设计：运行→正洗→反洗→正洗→运行。
- 启闭扭矩小，操作手感好。
- 可带压操作，无泄漏。

Adopt the high degree pottery, seal slice with scuff resistance, corrosion proof, perfect sealing, and long time for using.

Reasonable fluid design: Service--Fast Rinse--Backwash--Fast Rinse-- Service.

Small rotation angle for closing and opening, It feels well for operation.

It could operate with pressure, no leakage.

## 应用范围

### Range of Application

- 家用净水、软水系统
- 反渗透预处理系统
- 泳池过滤设备

Household Purify, Soften System.  
RO Rre-treatment System.

Swimming Pool Filter Equipment.

## 技术参数

### Technical Parameter

进水口	2" F	Inlet	2" F
出水口	2" F	Outlet	2" F
排水口	1-1/2" F	Drain	1-1/2" F
中心管	1-1/2" D-GB	Riser Pipe	1-1/2" D-GB
基座	4" -8UN	Base	4" -8UN
产水量	10 m <sup>3</sup> /h	Water Capacity	10 m <sup>3</sup> /h
侧装式连接件TOP与BOTTOM端		2"	

The top and bottom of connector for side-mounted---2"



## 温州市润新机械制造有限公司

WENZHOU RUNXIN MANUFACTURING MACHINE CO.,LTD

地址(Add): 浙江省温州市南郊龙方工业区1号地块

Add: No.1, Longfang Ind. Zone, Nanjiao, Wenzhou, Zhejiang, China

邮编 ( P.C ) : 325029

传真(Fax): +86-577-88633258

电话(Tel): +86-577-88635628 88576511 88631538 88630038

Http://www.run-xin.com

E-mail: runxin86@yahoo.com.cn

TM.F64A/B/C/D/F型

N64D/N64F型

专利号(Patent NO.):ZL02220153.X

专利号(Patent NO.):ZL200420078956.5

执行标准(Implement Standard):Q/WRX001-2008



TM.F64A

TM.F64D/F64F顶装

N64D/N64F顶装

(Top-mounted)



TM.F64B/C

F64C逆流再生 UP-flow



TM.F64D/F64F侧装

N64D/N64F侧装

(Side-mounted)



# 产品选型 Selected Product (TM.F64A)

## 工作流程图 Service Position

■ 硬水 Hard Water   
 ■ 软化水 Softened Water   
 ■ 盐水 Brine




控制模式 Control Model ----- 手动式 Manual

适用压力 Suited Pressure ----- 0.1~0.6MPa

适用水温 Suited Water Temperature ----- 5-45℃



运行状态 Service State

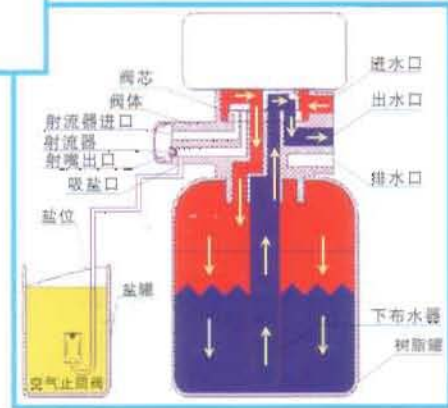

## 产品特点

## Product Characteristics

- 采用高平面度、耐磨损、耐腐蚀的端面密封片启闭。
- 直接手动操作实现即时再生。
- 加水时自动清洗射流器射嘴，以防堵塞。
- 单罐型控制阀再生时不出水。
- 当不需软化功能时，堵塞吸盐口可作净化处理。

- Adopt the high degree pottery, seal slice with scuff resistance, corrosion proof, perfect sealing, and long time for using.
- Manual operate directly realize regeneration immediately.
- Cleaning the ejection nozzle automatically when adding water, to prevent block.
- No coming water while single pot type control valve regeneration.
- When do not need soften function, block ejection nozzle could do purifier treatment..

## 技术参数

## Technical Parameter

型号	TM.F64A	TM.F64B	TM.F64C	TM.F64D N64D	TM.F64F N64F
进水口 (Inlet)	1" F	3/4" F	3/4" F	2" M	1-1/2" M
出水口 (Outlet)	1" F	3/4" F	3/4" F	2" M	1-1/2" M
排水口 (Drain)	1/2" M	1/2" M	1/2" M	1" M	3/4" M
中心管 (Riser Pipe)	1.05" OD	1.05" OD	1.05" OD	1-1/2" D-GB	1.25" D-GB
基座 (Base)	2-1/2" -8NPSM	2-1/2" -8NPSM	2-1/2" -8NPSM	4" -8UN	4" -8UN
吸盐口 (Brine Line Connector)	3/8" M	3/8" M	3/8" M	1/2" M	1/2" M
最大产水量 (Water Capacity)	4.5m <sup>3</sup> /h	2m <sup>3</sup> /h	2m <sup>3</sup> /h	10m <sup>3</sup> /h	8m <sup>3</sup> /h

## 应用范围

## Range of Application

- 家用净水、软水系统
- 反渗透预处理系统
- 锅炉给水软化系统

Household Purify, Soften System.

RO Rre-treatment System.

Boiler Softening Water System.



## 温州市润新机械制造有限公司

WENZHOU RUNXIN MANUFACTURING MACHINE CO.,LTD

地址 (Add): 浙江省温州市南郊龙方工业区1号地块

Add.No.1,Longfang Ind.Zone,Nanjiao,Wenzhou,Zhejiang,China

邮编 | P.C | 325029

传真 (Fax): +86-577-88633258

电话 (Tel): +86-577-88635628 88678511 88631538 88630038

Http://www.run-xin.com

E-mail:runxin88@yahoo.com.cn

控制模式Control Model-----手动式Manual

适用压力Suited Pressure-----0.15~0.6MPa

适用水温Suited Water Temperature-----5~45°C

### 产品特点

### Product Characteristics

- 端面密封启闭方式  
Hermetic head faces for opening and closing.
- 侧面控制，方便操作  
Side-controlled, convenient for operation
- 直接手动操作实现即时再生或冲洗  
Manual function could realize regeneration or washing.

### 应用范围

### Range of Application

- 家用净化系统  
Household Purification System
- 家用软化系统  
Household Softening System
- 锅炉给水软化  
Boiler Softening Water System
- 反渗透预处理系统  
RO Pre-treatment System

### 技术参数

### Technical Parameter

参数	型号	TM.F56AC	TM.F56EC	TM.F64AC	F64BC (Pervious model is F64E)
进水口 (Inlet)		1" F	3/4" F or 1/2" F	1" F	3/4" F
出水口 (Outlet)		1" F	3/4" F or 1/2" F	1" F	3/4" F
排水口 (Drain)		1" F	3/4" F or 1/2" F	1/2" M	1/2" M
中心管 (Riser Pipe)		1.05" OD	1.05" OD	1.05" OD	1.05" OD
基座 (Base)		2-1/2" -8NPSM	2-1/2" -8NPSM	2-1/2" -8NPSM	2-1/2" -8NPSM
最大产水量 (Water Capacity)		4.5m <sup>3</sup> /h	2m <sup>3</sup> /h	4.5m <sup>3</sup> /h	2m <sup>3</sup> /h
吸盐口 Brine Line Connector				3/8" M	3/8" M



## 温州市润新机械制造有限公司

WENZHOU RUNXIN MANUFACTURING MACHINE CO.,LTD

地址(Add): 浙江省温州市南郊龙方工业区1号地块

Add: No.1, Longfang Ind. Zone, Nanjiao, Wenzhou, Zhejiang, China

邮编 (P.C) : 325029

传真(Fax): +86-577-88633258

电话(Tel): +86-577-88635628 88576511 88631538 88630038

Http://www.run-xin.com

E-mail: runxin86@yahoo.com.cn

