



DOWEX HCR-S

A High Capacity Cation Exchange Resin for Softening and Demineralization Applications

Product	Type	Matrix	Functional group
DOWEX* HCR-S	Strong acid cation	Styrene-DVB gel	Sulfonic acid

Guaranteed Sales Specifications		Na ⁺ form	H ⁺ form
Total exchange capacity, min.	eq/l	2.0	1.8
	kgr/ft ³ as CaCO ₃	43.7	39.3
Bead size distribution range† 0.3 mm - 1.2 mm, min. (50 mesh - 16 mesh)	%	90	90
Acidity range	pH	7.0 - 9.5	—
Color throw, as packaged, max.	APHA	20	—

Typical Physical and Chemical Properties		Na ⁺ form	H ⁺ form
Water content	%	44 - 48	50 - 56
Whole uncracked beads	%	90 - 100	90 - 100
Total swelling (Na ⁺ → H ⁺)	%	8	8
Particle density	g/ml	1.28	1.22
Shipping weight	g/l	820	780
	lbs/ft ³	51	49

Recommended Operating Conditions

- Maximum operating temperature: 120°C (250°F)
- pH range: 0 - 14
- Bed depth, min.: 800 mm (2.6 ft)
- Flow rates:
 - Service/fast rinse: 5-50 m/h (2-20 gpm/ft²)
 - Backwash: See figure 1
 - Co-current regeneration/displacement rinse: 1-10 m/h (0.4-4 gpm /ft²)
- Total rinse requirement: 3 - 6 Bed volumes
- Regenerant: 1-8% H₂SO₄, 4-8% HCl or 8-12% NaCl

† For additional particle size information, please refer to Particle Size Distribution Cross Reference Chart (Form No. 177-01775).

Typical properties and applications

DOWEX HCR-S cation exchange resin is a high capacity resin with excellent kinetics and good physical, chemical and thermal stability.

DOWEX HCR-S cation exchange resin is well suited for industrial water softening and demineralization in the co-current mode of regeneration.

Packaging

25 liter bags or 5 cubic feet fiber drums

Figure 1. Backwash Expansion Data


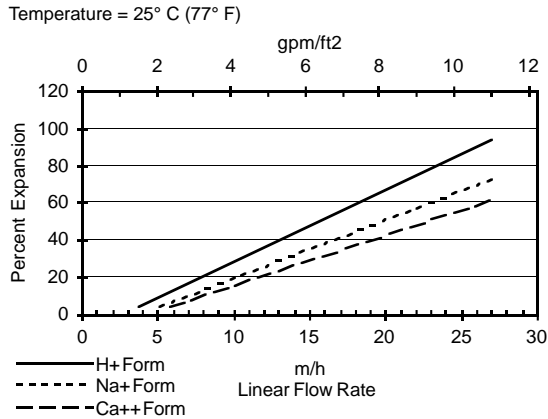


Figure 2. Pressure Drop Data

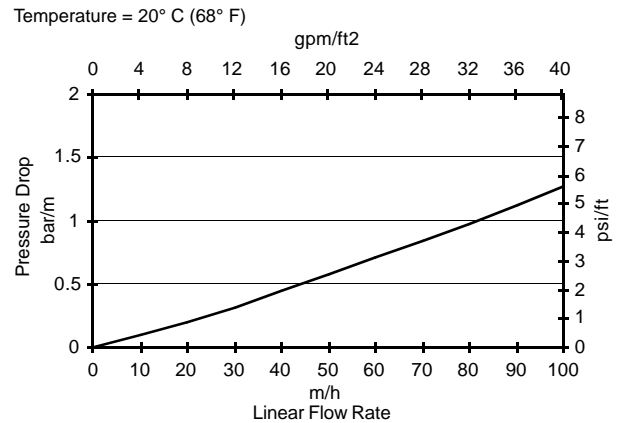

For other temperatures use:

$$F_T = F_{77°F} [1 + 0.008 (T_F - 77)], \text{ where } F = \text{gpm/ft}^2$$

$$F_T = F_{25°C} [1 + 0.008 (1.8T_C - 45)], \text{ where } F = \text{m/h}$$

For other temperatures use:

$$P_T = P_{20°C} / (0.026 T_C + 0.48), \text{ where } P = \text{bar/m}$$

$$P_T = P_{68°F} / (0.014 T_F + 0.05), \text{ where } P = \text{psi/ft}$$

DOWEX Ion Exchange Resins
For more information about DOWEX resins, call the Dow Liquid Separations business:

North America: 1-800-447-4369
Latin America: (+55) 11-5188-9277
Europe: (+32) 3-450-2240
Japan: (+81) 3-5460-2100
Australia: (+61) 3-9226-3545
<http://www.dowex.com>

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

